

E-500 - E-501

Modular Piezo Control Systems (HVPZT & LVPZT)

>> Click <http://www.pi.ws/fwd/Piezo-Driver> for the Latest Specs on these Products



Configuration example: E-501 chassis with optional E-505 LVPZT amplifier, E-509.C1A piezo servo-controller for capacitive sensors and E-516.i3 20-bit DAC interface/display.



Configuration example: E-500 chassis with three optional E-507 HVPZT amplifiers, E-509.L3 piezo servo-controller for LVDT sensors and E-516.i3 20-bit DAC interface/display.

- For High- and Low-Voltage Piezo Systems
- 19- and 9.5-Inch Chassis
- Optional Position Servo-Control Modules
- Optional Display and RS-232 & IEEE 488 Interface Module

The E-500 is a modular, 19" rackmount chassis for piezo amplifiers and position servo-controllers. An integrated multi-function power supply (E-530.00) provides operating voltages for all available modules including amplifiers, servo-controllers, display and interface modules (see system configuration, p. 6-19 ff. A more-compact 9.5-inch version of the system is available

as the E-501. That chassis can hold one amplifier module (1- or 3-channel units available), one servo-control module (1- or 3-channel) and one display/interface module (1- or 3-channel).

E-500 and E-501 systems are assembled to order, tested, and, if a servo-controller is present, calibrated with the associated piezo mechanics.

A modified E-500 chassis for up to 6 channels is available on request. For systems with up to 12 channels, the E-500.621 chassis with E-621 amplifier/controller modules can be used (see p. 6-36).

Ordering Information

E-500.00
Piezo Amplifier & Position Servo-Controller, up to 3 Channels, Basic Chassis, 19"

E-501.00
Piezo Amplifier & Position Servo-Controller, up to 3 Channels, Basic Chassis, 9.5"

Ask about custom designs!



30-channel controller consisting of 3 E-500.621 chassis, each of which can accommodate up to 12 E-621 modules.

Technical Data


Models	E-500.00	E-501.00
Function	19" chassis for piezo electronics: amplifier modules, sensor modules, position servo-control modules, display/interface modules	9.5" chassis for piezo electronics: amplifier modules, sensor modules, position servo-control modules, display/interface modules
Channels	1, 2, 3	1, 3
Dimensions	450 x 132 x 296 mm + handles (see p. 6-10)	236 x 132 x 296 mm + handles (see p. 6-10)
Integrated power supply	E-530.00	E-531.00
Operating voltage	90-264 VAC, 50-60 Hz, E-530.00 primary switching P/S;	90-120 / 220-264 VAC, 50-60 Hz, E-531.00 linear P/S

E-500 - E-501

System Configuration

E-500, 19" Chassis Models

E-501, 9.5" Chassis

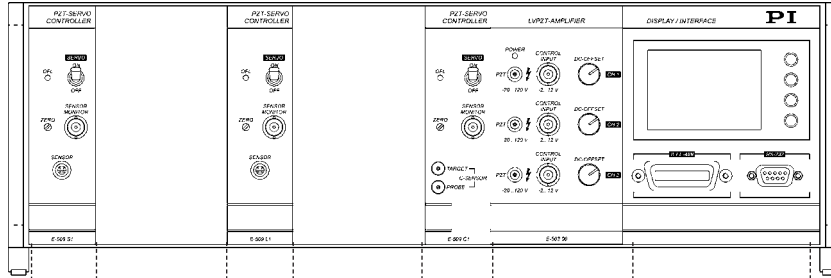

E-500 chassis with the following optional modules: E-503 LVPZT amplifier, three E-509 piezo servo-controllers (E-509.S1: strain gauge; E-509.L1: LVDT; E-509.C1A: capacitive sensor) and E-516.i3 20-bit DAC interface/display.

	Contr. Slot 3	Amplifier Slot 3	Contr. Slot 2	Amplifier Slot 2	Contr. Slot 1	Amplifier Slot 1	Display/Interface Slot
--	---------------	------------------	---------------	------------------	---------------	------------------	------------------------

Installable Amplifier Modules

E-503.00 (LV, 3 ch) / E-503.00S*							
E-505.00 (LV, 1 ch) / E-505.00S*							
E-507.XX (HV, 1 ch)							

Installable Sensor & Position Servo-Control Modules

E-509.C1A (Capacitive, 1 ch)							
E-509.L1 (LVDT, 1 ch)							
E-509.S1 (SGS, 1 ch)							
E-509.C2A (Capacitive, 2 ch)							
E-509.C3A (Capacitive, 3 ch)							
E-509.L3 (LVDT, 3 ch)							
E-509.S3 (SGS, 3 ch)							

Installable Display/Interface Modules

E-515 (1 / 3 ch)							
E-516 (1 / 3 ch)							

Minimal Configuration, PZT Amplifier Function only

--	--	--	--	--	--	--	--

Extended Configuration, PZT Amplifier with additional Position Servo-Controller

--	--	--	--	--	--	--	--

Extended Configuration, PZT Amplifier with additional Display (and interface, no Servo-Controller)

--	--	--	--	--	--	--	--

Extended Configuration, PZT Amplifier with additional Servo-Controller and Display (and interface)

--	--	--	--	--	--	--	--

Can be installed in E-500 Can be installed in E-501 or E-500

HV: High Voltage LV: Low Voltage

* For differential tip/tilt systems with one fixed voltage of +100 V.

Piezo Actuators

Nanopositioning & Scanning Systems

Active Optics / Steering Mirrors

Tutorial: Piezo-electrics in Positioning

Capacitive Position Sensors

Piezo Drivers & Nanopositioning Controllers

Hexapods / Micropositioning

Photonics Alignment Solutions

Motion Controllers

Ceramic Linear Motors & Stages

Index

E-500 - E-501

Module Survey & Ordering Examples

The following modules can be installed in E-500 / E-501 chassis:

■ **Amplifier modules**
(see page 6-23 ff.)

E-503.00 (E-503.00S)
LVPZT Amplifier Module,
3 Channels, -20 to +120 V,
3 x 14 W

E-505.00 (E-505.00S)
LVPZT Amplifier Module,
-20 to +120 V, 200 W, 1 Channel

E-507.00 (E-507.36)
HVPZT Amplifier Module,
-3 to -1100 V, 50 W, 1 Channel
or ± 250 V for Shear Actuators

■ **Display & DAC-Interface**
Modules (see page 6-26 ff.)

E-516.i1 / E-516.i3
20-bit DAC Interface/Display
Module, IEEE 488/RS-232, 1 or
3 Channels

E-515.01
Display Module for Piezo Vol-
tage/Displacement, 1 Channel

E-515.03
Display Module for Piezo Vol-
tage/Displacement, 3 Channels

■ **Sensor & Servo-Controller**
Modules (see page 6-22)

E-509.C1A
Piezo Sensor/Controller
Module, Capacitive Sensor,
1 Channel

E-509.C2A
Piezo Sensor/Controller
Module, Capacitive Sensor,
2 Channels

E-509.C3A
Piezo Sensor/Controller
Module, Capacitive Sensor,
3 Channels

E-509.S1
Piezo Sensor/Controller
Module, Strain Gauge Sensor,
1 Channel

E-509.S3
Piezo Sensor/Controller
Module, Strain Gauge Sensor,
3 Channels

E-509.L1
Piezo Sensor/Controller
Module, LVDT Sensor,
1 Channel

E-509.L3
Piezo Sensor/Controller
Module, LVDT Sensor,
3 Channels



E-507, p. 6-23



E-505, p. 6-25



E-503, p. 6-24



E-515, p. 6-28



E-516, p. 6-26



E-509, p. 6-22

Configuration Examples

■ LVPZT Amplifier, 3 Channels, (14 W) without Display:

1 x E-501.00 (E-500.00)
Modular Piezo Control System, 19" Basic Chassis

1 x E-503.00
LVPZT Amplifier Module, 3 Channels, 3 x 14 W

■ HVPZT Amplifier, 3 Channels, with DAC Interface & Display:

1 x E-500.00
Modular Piezo Control System, 19" Basic Chassis

3 x E-507.00
HVPZT Amplifier Module, 50 W

1 x E-516.i3
20-bit DAC Interface/Display Module, IEEE 488/RS-232, 3 Channels

■ HVPZT Amplifier & Position Servo-Controller (LVDT Sensors), 3 Channels, with Display & DAC Interface:

1 x E-500.00
Modular Piezo Control System, 19" Basic Chassis

3 x E-507.00
HVPZT Amplifier Module, 50 W

1 x E-509.L3
Piezo Sensor/Controller Module, LVDT Sensor, 3 Channels

1 x E-516.i3
20-bit DAC Interface/Display Module, IEEE 488/RS-232, 3 Channels

■ Closed-loop operation of P-733.2CL XY piezo stage (capacitive sensors) fastest possible step response, computer control:

1 x E-500.00
Modular Piezo Control System, 19" Basic Chassis

2 x E-505.00
LVPZT Amplifier Module, 200 W

1 x E-509.C2A
Piezo Sensor/Controller Module, Capacitive Sensor, 2 Channels

1 x E-516.i3
20-bit DAC Interface/Display Module, IEEE 488/RS-232, 3 Channels

■ Closed-loop operation of the P-733.2CL XY piezo stage (capacitive sensors) and P-721.CLQ PIFOC® objective positioner (capacitive sensor), static and/or slow operation, computer control, 9.5" chassis:

1 x E-501.00
Modular Piezo Control System, 9.5" Basic Chassis

1 x E-503.00
LVPZT Amplifier Module, 3 Channels, 3 x 14 W

1 x E-509.C3A
Piezo Sensor/Controller Module, Capacitive Sensors, 3 Channels

1 x E-516.i3
20-bit DAC Interface/Display Module, IEEE 488/RS-232, 3 Channels

■ Closed-loop operation of S-340 tip/tilt platform (LVDT sensors), shortest possible step response, external analog control:

1 x E-500.00
Modular Piezo Control System, 19" Basic Chassis

2 x E-505.00
LVPZT Amplifier Module, 200 W

1 x E-505.00S
LVPZT Driver Module, 100 V

1 x E-509.L3
Piezo Sensor/Controller Module, LVDT Sensor, 3 Channels

■ Closed-loop operation of P-733.2CL XY stage (capacitive sensors) and P-721.LLQ PIFOC® objective positioner (LVDT sensor), shortest possible step response, computer control:

1 x E-500.00
Modular Piezo Control System, 19" Basic Chassis

3 x E-505.00
LVPZT Amplifier Module, 200 W

2 x E-509.C1A
Piezo Sensor/Controller Module, Capacitive Sensor

1 x E-509.L1
Piezo Sensor/Controller Module, LVDT Sensor

1 x E-516.i3
20-bit DAC Interface/Display Module, IEEE 488/RS-232, 3 Channels

■ Closed-loop operation of 3 P-841.10 LVPZT translators (strain gauge sensors) static and medium dynamics operation, external analog control, future upgrade for high dynamics operation possible:

1 x E-500.00
Modular Piezo Control System, 19" Basic Chassis (can accommodate 3 x E-505, 200 W amplifiers)

1 x E-503.00
LVPZT Amplifier Module, 3 Channels, 3 x 14 W

1 x E-509.S3
Piezo Sensor/Controller Module, Strain Gauge Sensor, 3 Channels

Optional:

1 x E-515.03
Display Module for Piezo Voltage/Displacement, 3 Channels

Piezo Actuators

Nanopositioning & Scanning Systems

Active Optics / Steering Mirrors

Tutorial: Piezo-electrics in Positioning

Capacitive Position Sensors

Piezo Drivers & Nanopositioning Controllers

Hexapods / Micropositioning

Photonics Alignment Solutions

Motion Controllers

Ceramic Linear Motors & Stages

Index