

M-219

Optional Tips for Micrometers and Actuators

>> Click <http://www.pi.ws/fwd/Micropositioning> for the Latest Specs on these Products

Ordering Information

M-219.00
Spherical Tip, M10 x 0.5 mm


M-219.10
Ball Tip, M10 x 0.5 mm

M-219.20
Tip with M 5 Threaded Stud,
M10 x 0.5 mm

M-219.30
Hardened Stainless Steel Tip,
M10 x 0.5 mm

Ask about custom designs!

M-227 DC-Mikes, M-168 Stepper Mikes and M-631 to M-633 manual micrometer drives are supplied with flat tips. The following optional replacement tips are available (all with M10x 0.5 mm fine threads):

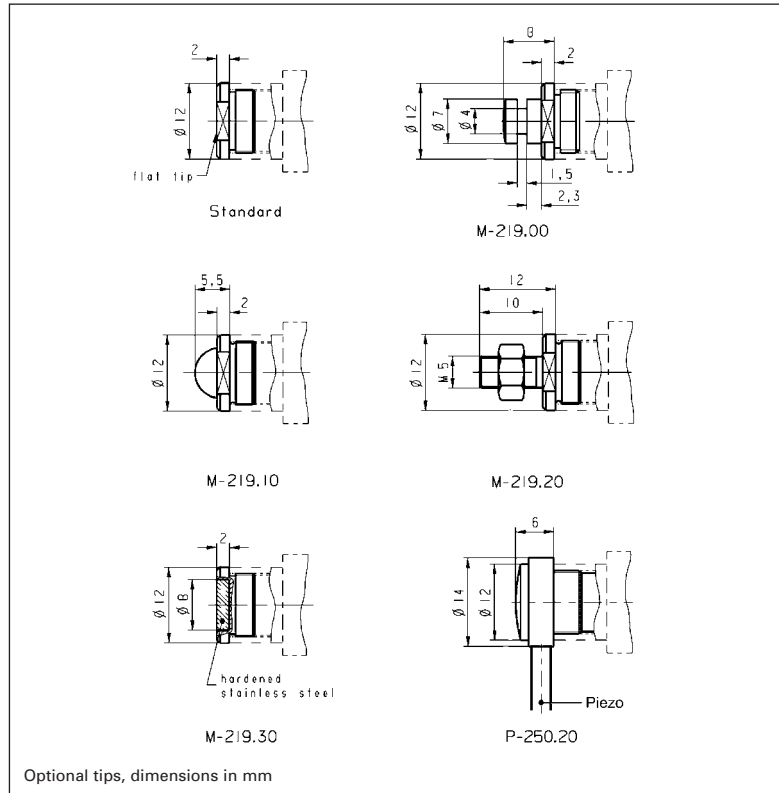

Piezo Actuators

Nanopositioning & Scanning Systems

Active Optics / Steering Mirrors

Tutorial: Piezo-electrics in Positioning

Capacitive Position Sensors

Piezo Drivers & Nano-positioning Controllers

Hexapods / Micropositioning

Photonics Alignment Solutions

Motion Controllers

Ceramic Linear Motors & Stages

Index

P-250.20

High-Resolution Piezo Micrometer Tip

Ordering Information

P-250.20
Micrometer-Mountable Piezo Translator

The P-250.20 piezo translator can be mounted like an optional tip. It has a travel range of 20 µm and sub-nanometer resolution with response in the millisecond range. For further information and technical data see page 1-33 in the "Piezo Actuators" section.

